



HTM12864-7-05G-N3S

产品名称 (Product name) : 黑白点阵模组
 型号 (Model) : HOT HTM12864-7-05G-N3S
 编号 (Part number) : 201408013
 日期 (Date) : 2014-08-25



深圳市鑫洪泰电子科技有限公司 Shenzhen Hot Display Technology Co.,Ltd		
编制 Prepared by	审核 Checked by	核准 Approved by
<i>[Signature]</i>	<i>[Signature]</i>	<i>[Signature]</i>

编码: QR-R-011 A/0

序号:

Rev.	Descriptions	Date
01	Prelimiary Release	2014-08-25

Table of Content

1. Basic Specifications	-----	3
1.1 Display Specifications	-----	3
1.2 Mechanical Specifications	-----	3
1.3 Circuit Diagram	-----	3
1.4 Terminal Function	-----	4
1.5 Product Outline	-----	5
1.6 Schematic Diagram	-----	6
2. Absolute Maximum Ratings	-----	7
3. Electrical Characteristics	-----	7
3.1 DC Characteristics	-----	7
3.2 LED Backlight Circuit	-----	7
3.3 AC Characteristics	-----	8
3.4 Reset Timing	-----	9
4. Function specifications	-----	9
4.1 The Parallel Interface	-----	9
4.2 Basic Setting	-----	10
4.3 Resetting the LCD module	-----	10
4.4 Display Memory Map	-----	10
4.5 Display Commands	-----	11
4.6 Basic Operating Sequence	-----	12
5. Inspection Standards	-----	13
6. Handling Precautions	-----	14
6.1 Mounting method	-----	14
6.2 Cautions of LCD handling and cleaning	-----	14
6.3 Caution against static charge	-----	14
6.4 Packaging	-----	14
6.5 Caution for operation	-----	14
6.6 Storage	-----	14
6.7 Safety	-----	14
7 Packaging specifications	-----	15


1. Bsaic Specifications

1.1 Display Specifications


- 1>LCD Display Mode : STN, Positive, Yellow-Green Transmissive
- 2>Viewing Angle : 6H
- 3>Driving Method : 1/64 Duty, 1/9 Bias
- 4>Backlight : Green LED

1.2 Mechanical Specifications

- 1>Outline Dimension : 94.98x55.0 x7.8mm (See attached Outline Drawing for Details)

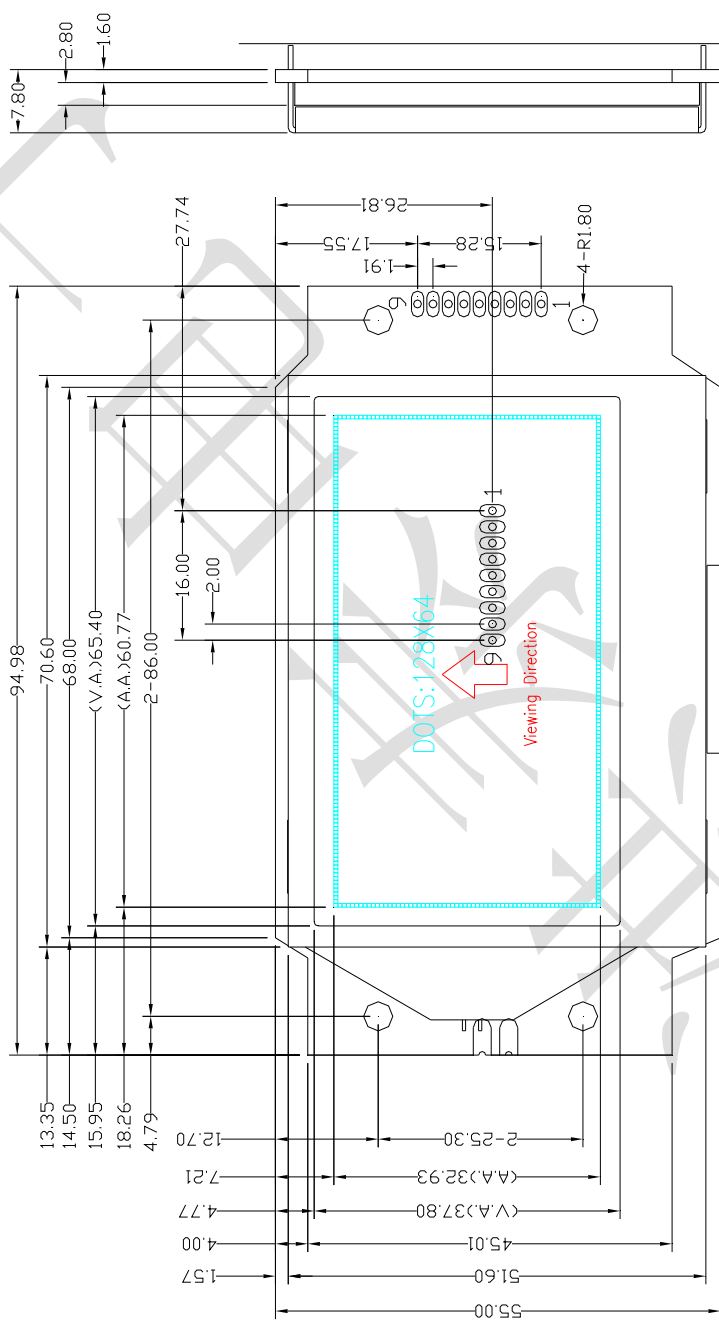

1.3 Circuit Diagram

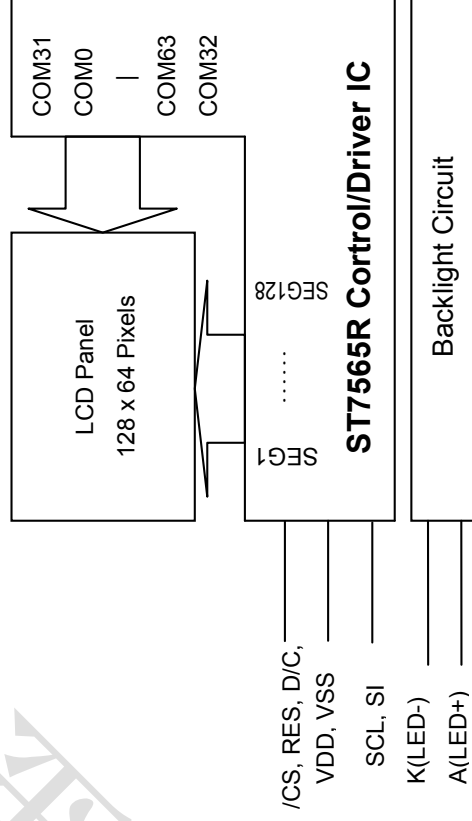




鑫洪泰

HOT DISPLAY 为您提供专业的显示解决方案


HTM12864-7-05G-N3S

1.4 Terminal Function

Pin No.	Pin Name	Function
1	/CS	This is the chip select signal.
2	RES	When /RES is set to "L", the register settings are initialized (cleared). The reset operation is performed by the /RES signal level
3	D/C	This is connect to the least significant bit of the normal MPU address bus, and it determines whether the data bits are data or command.
4	SCL	The serial clock input (SCL).
5	SI	Serial data input (SI)
6	VDD	Power supply voltage (Positive)
7	VSS	Negative power supply, 0V
8	K (LED-)	Negative power supply (Backlight)
9	A (LED+)	Backlight Power supply voltage (Positive)

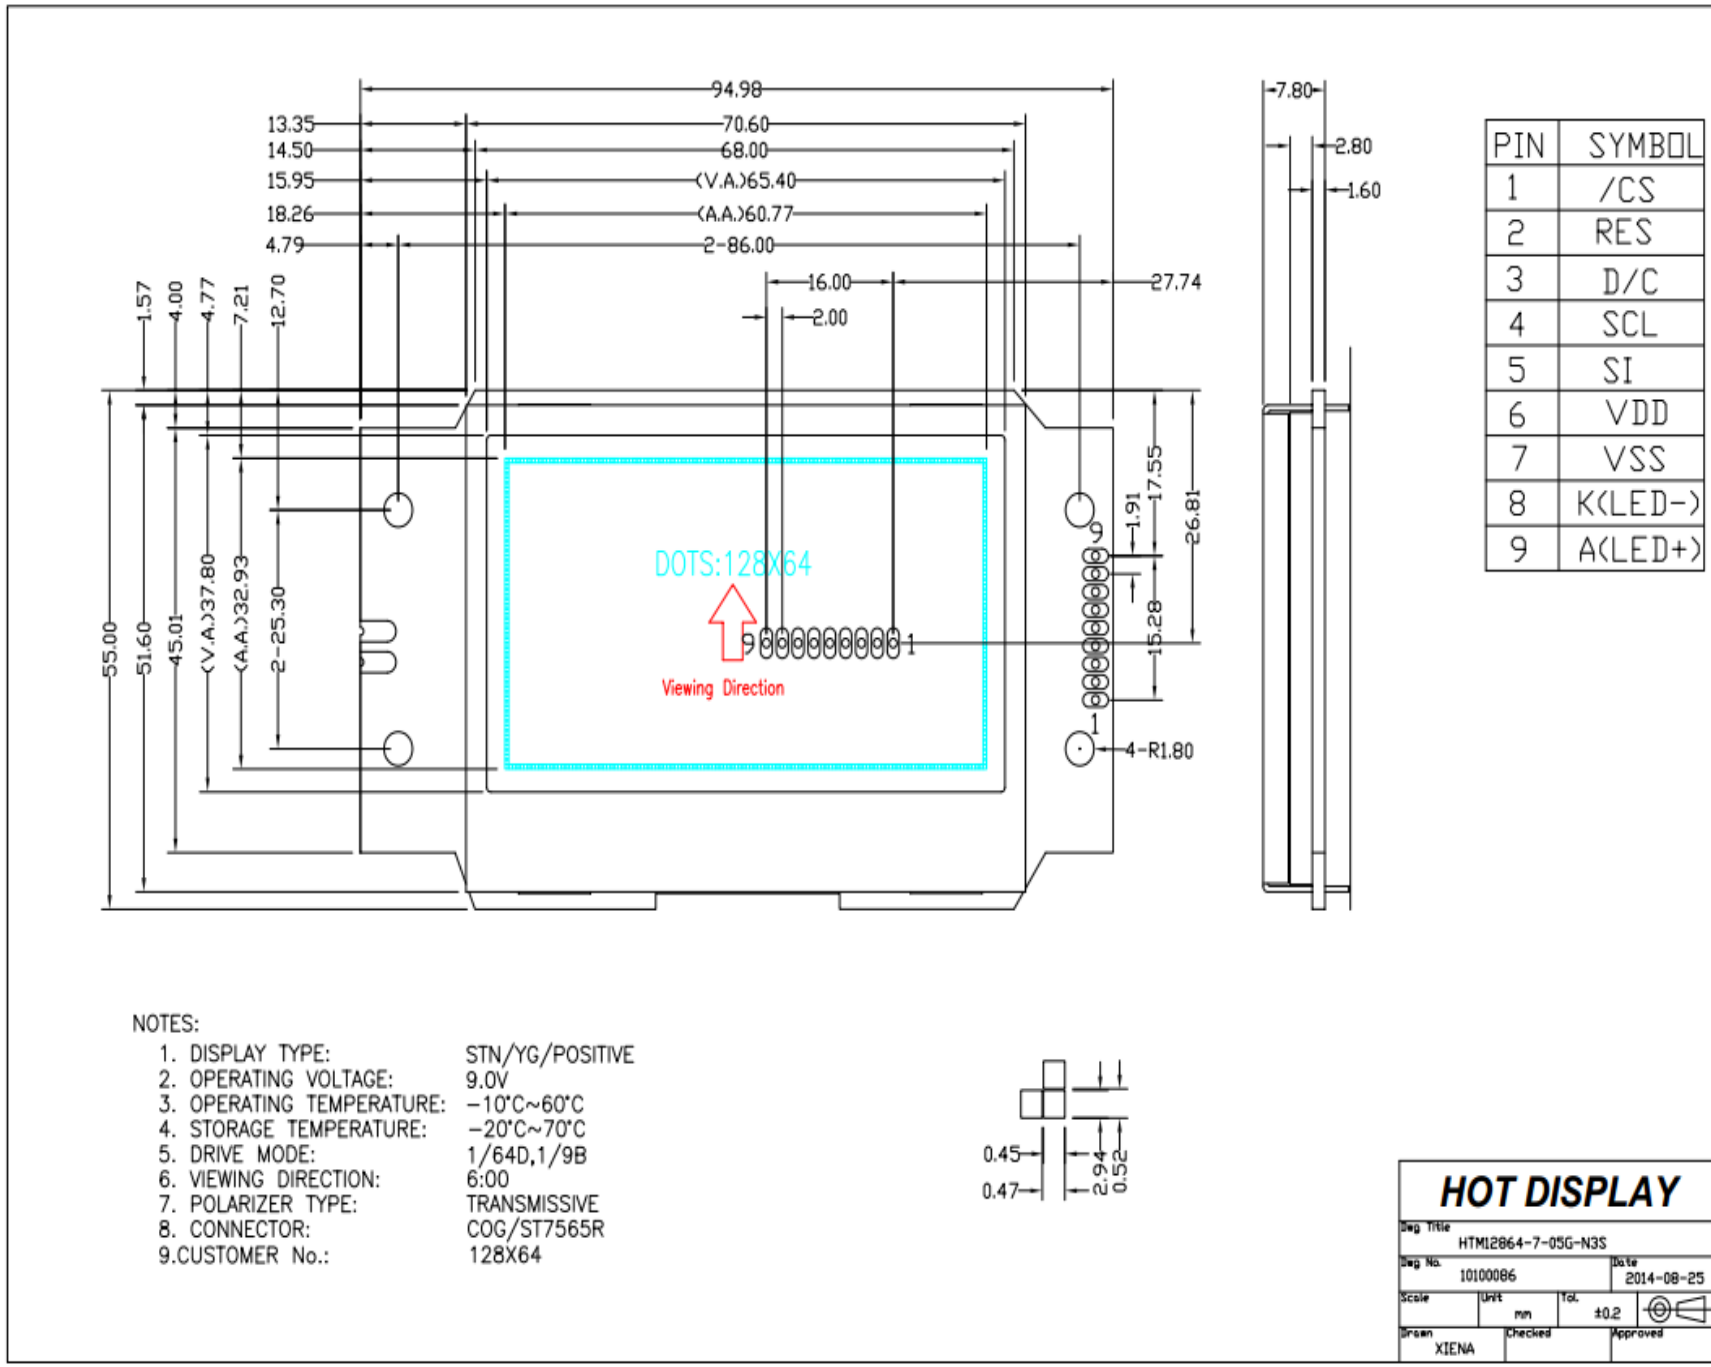
1.5 Product Outline

NOTES:

- | | |
|---------------------------|-----------------|
| 1. DISPLAY TYPE: | STN/YG/POSITIVE |
| 2. OPERATING VOLTAGE: | 9.0V |
| 3. OPERATING TEMPERATURE: | -10°C~60°C |
| 4. STORAGE TEMPERATURE: | -20°C~70°C |
| 5. DRIVE MODE: | 1/64D,1/9B |
| 6. VIEWING DIRECTION: | 6:00 |
| 7. POLARIZER TYPE: | TRANSMISSIVE |
| 8. CONNECTOR: | COG/ST7565R |
| 9. CUSTOMER No.: | 128X64 |



HOT DISPLAY

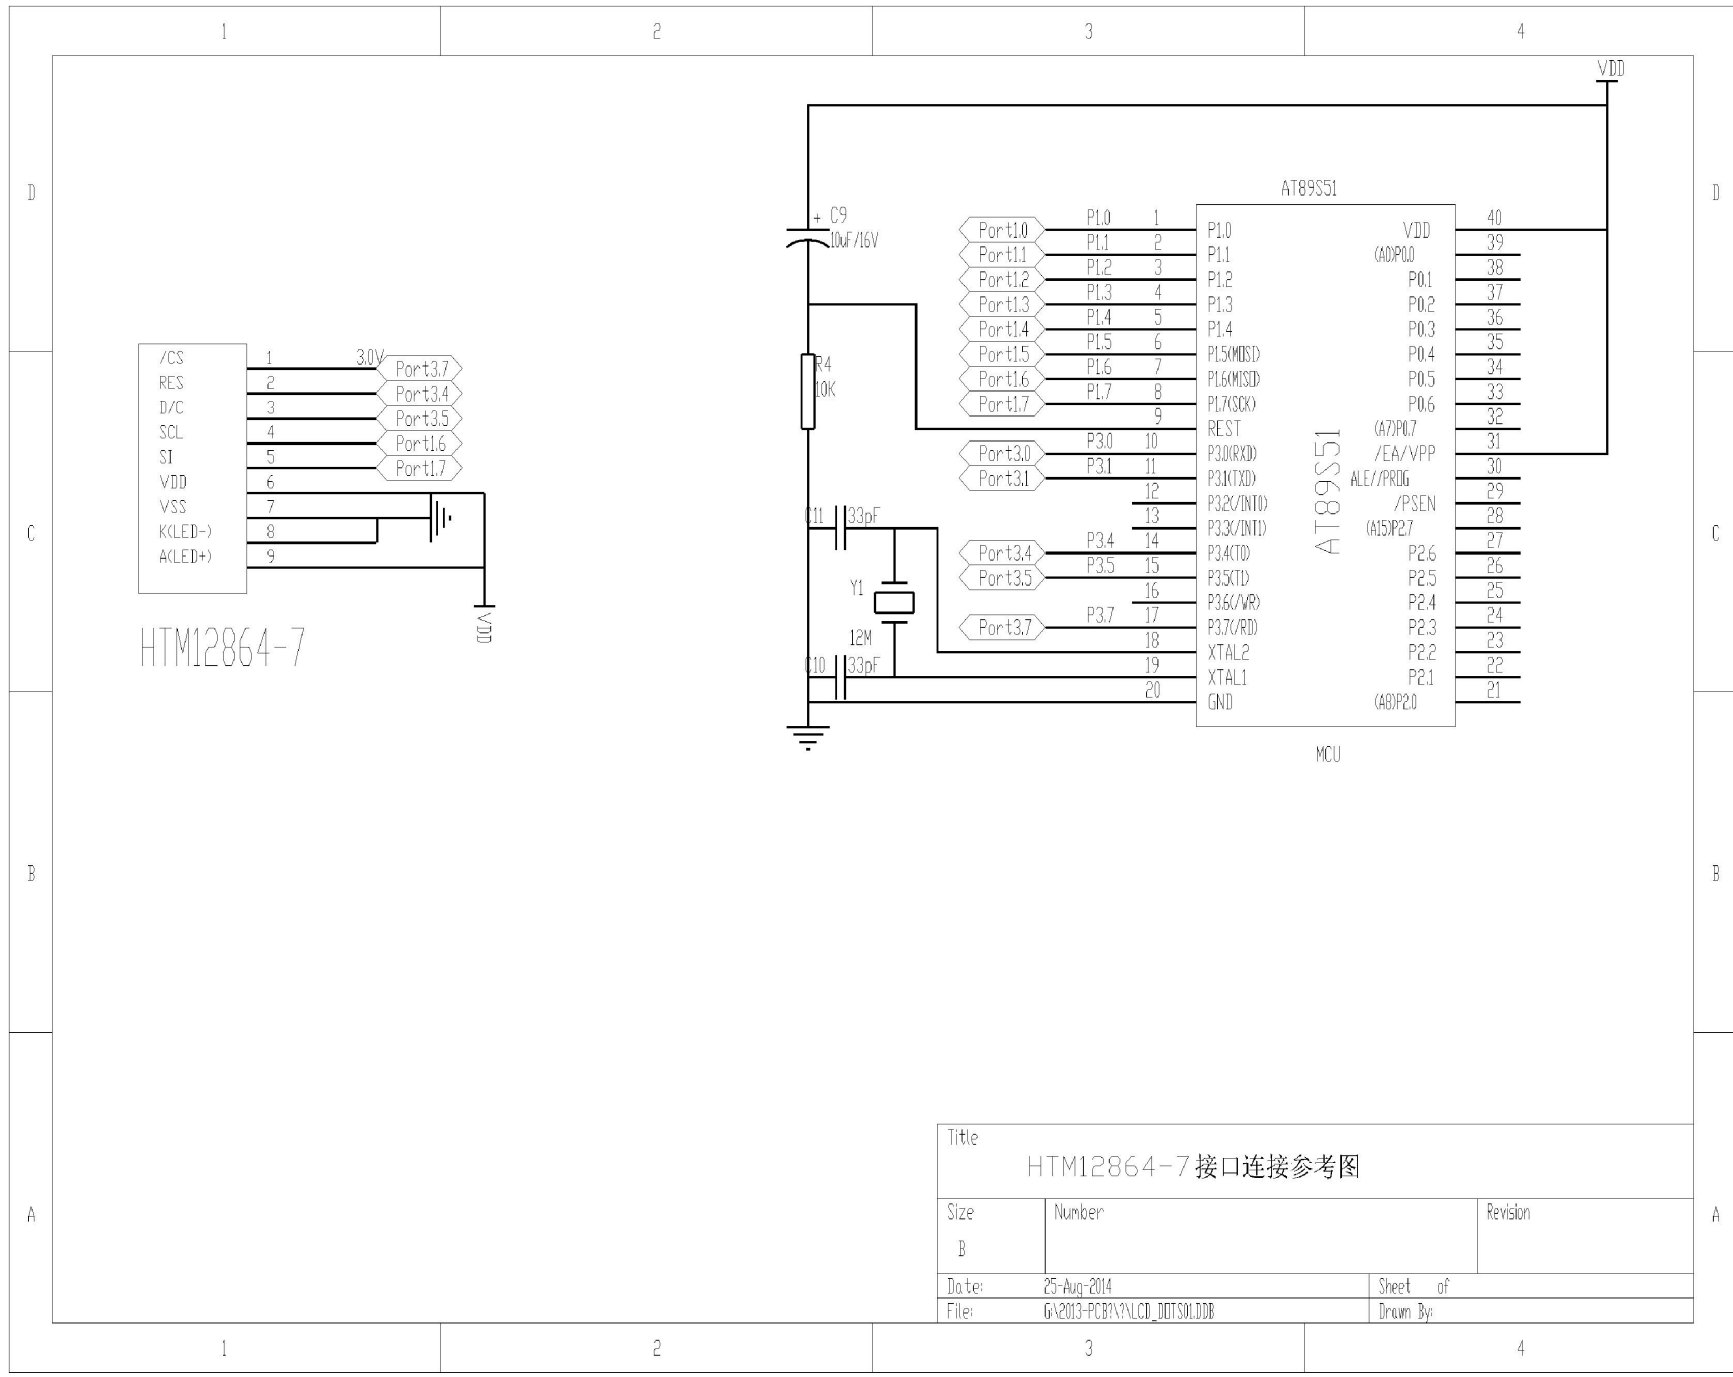Dwg Title		HTM12864-7-05G-N3S	
Dwg No.	10100086	Date	2014-08-25
Scale	mm	Tol.	±0.2
Drawn	Checked	Approved	
XIENA			

1.6 Schematic Diagram


Title		
HTM12864-7 接口连接参考图		
Size	Number	Revision
B		
Date:	25-Aug-2014	Sheet of
File:	GA2013-PCB1\?NLCD_DOTSO1.DDB	Drawn By:

2. Absolute Maximum Ratings

Items	Symbol	MIN.	MAX.	Unit	Condition
Supply Voltage	V _{DD}	-0.3	+3.6	V	V _{SS} = 0V
Input Voltage	V _{IN}	-0.3	V _{DD} +0.3	V	V _{SS} = 0V
Operating Temperature	T _{OP}	-10	+60	°C	No Condensation
Storage Temperature	T _{st}	-20	+70	°C	No Condensation

3. Electrical Characteristics

3.1 DC Characteristics

V_{SS} = 0V, Top = 25°C

Items	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Operating Voltage	V _{DD}	3.0	3.3	3.6	V	V _{DD}
Input High Voltage	V _{IH}	0.8 x V _{DD}	-	V _{DD}	V	/CS1,/RES,A0,/WR, /RD,D0~D7,C86
Input Low Voltage	V _{IL}	V _{SS}	-	0.2 x V _{DD}	V	
Output High Voltage	V _{OH}	0.8 x V _{DD}	-	V _{DD}	V	D0~D7
Output Low Voltage	V _{OL}	V _{SS}	-	0.2 x V _{DD}	V	D0~D7
Input Leakage Current	I _{LI}	-1.0	-	1.0	μA	V _{DD}
Output Leakage Current	I _{Lo}	-3.0	-	3.0	μA	V _{DD}

3.2 LED Backlight Circuit


V_{SS} = 0V, Top = 25°C

Items	Symbol	MIN.	TYP.	MAX.	Unit	Condition
Forward Voltage	V _f BLA	-	3.1	-	V	V _{DD}
Forward Current	I _f BLA	-	10	15	mA	V _{DD}



3.3 AC Characteristics

3.3.1 4-line SPI Mod

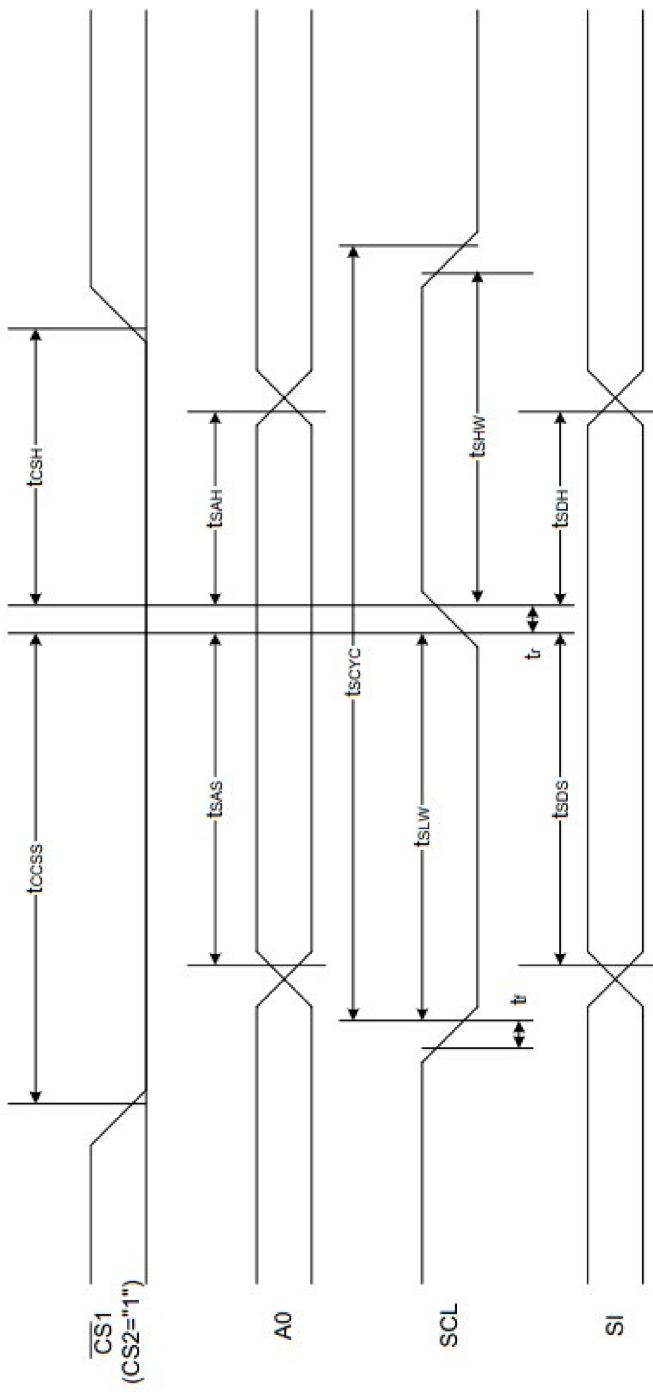


($V_{DD} = 3.3V, T_a = -30 \text{ to } 85^\circ\text{C}$)

Item	Signal	Symbol	Condition	Rating		Units
				Min.	Max.	
4-line SPI Clock Period		T_{scyc}		50	—	
SCL "H" pulse width	SCL	T_{shw}		25	—	
SCL "L" pulse width	SCL	T_{slw}		25	—	
Address setup time	A0	T_{sas}		20	—	
Address hold time	A0	T_{sah}		10	—	ns
Data setup time	SI	T_{sdh}		20	—	
Data hold time	SI	T_{shw}		10	—	
CS-SCL time	CS	T_{css}		20	—	
CS-SCL time	CS	T_{sch}		40	—	

($V_{DD} = 1.8V, T_a = -30 \text{ to } 85^\circ\text{C}$)

Item	Signal	Symbol	Condition	Rating		Units
				Min.	Max.	
4-line SPI Clock Period		T_{scyc}		200	—	
SCL "H" pulse width	SCL	T_{shw}		80	—	
SCL "L" pulse width	SCL	T_{slw}		80	—	
Address setup time	A0	T_{sas}		60	—	
Address hold time	A0	T_{sah}		30	—	ns
Data setup time	SI	T_{sdh}		60	—	
Data hold time	SI	T_{shw}		30	—	
CS-SCL time	CS	T_{css}		40	—	
CS-SCL time	CS	T_{sch}		100	—	

3.2 Reset Timing

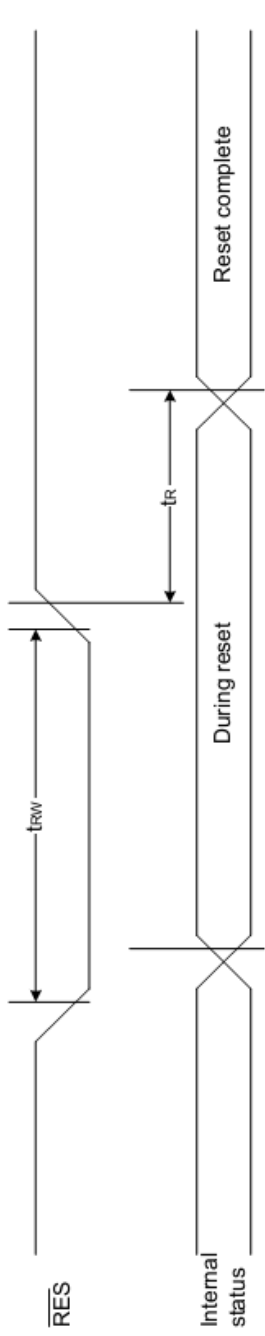

$(V_{DD} = 3.3V, T_a = -30 \text{ to } 85^\circ\text{C})$

Item	Signal	Symbol	Condition	Rating		Units
				Min.	Max.	
Reset time		t_r		—	1.0	μs
Reset "L" pulse width	/RES	t_{RW}		1.0	—	μs

Table 37

$(V_{DD} = 2.7V, T_a = -30 \text{ to } 85^\circ\text{C})$

Item	Signal	Symbol	Condition	Rating		Units
				Min.	Max.	
Reset time		t_r		—	2.0	μs
Reset "L" pulse width	/RES	t_{RW}		2.0	—	μs

Table 38

$(V_{DD} = 1.8V, T_a = -30 \text{ to } 85^\circ\text{C})$

Item	Signal	Symbol	Condition	Rating		Units
				Min.	Max.	
Reset time		t_r		—	3.0	μs
Reset "L" pulse width	/RES	t_{RW}		3.0	—	μs


Note:

*a. all timing is using 20% and 80% of VDD as the reference.

4. Function specifications

4.1 The Serial Interface

When the serial interface has been selected then when the chip is in active state the serial data input(SI) and the serial clock(SCL) can be received. The serial data is read from the serial data input pin in the rising edge of the serial clock . When "A0"="H", the data is display data, and when "A0"="L", the data is command.

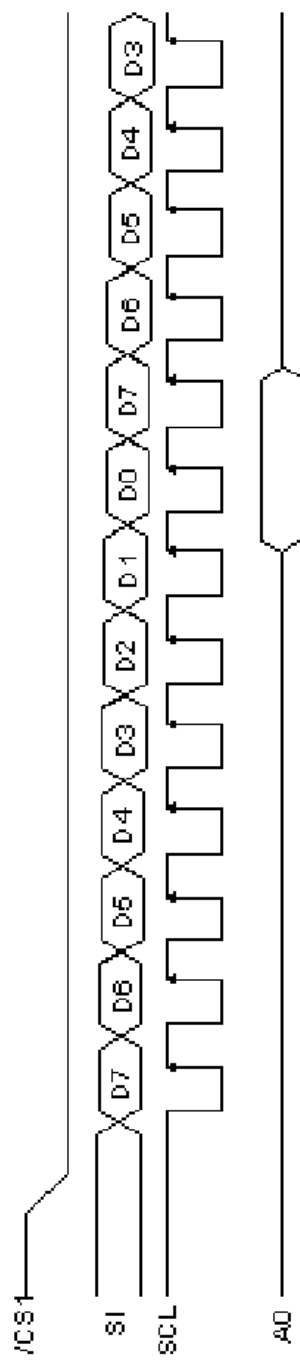

4.2 Basic Setting

To drive the LCD module correctly and provide normally display, please use the following setting

- 1> ADC = 0 (normal)
- 2> SHL select = 1(reverse)
- 3> LCD Bias Select = 1/9
- 4> Initial Display Line = 0
- 5> Entire Display ON/OFF = OFF(normal)
- 6> Reverse Display ON/OFF = OFF(normal)
- 7> Set Power Control Set:
Voltage follower = ON,voltage converter = ON,Voltage regulator = ON
- 8> Display ON/OFF =ON

4.3 Resetting the LCD module

The LCD module should be initialized bu using /RES terminal.
While turning on the VDD and VSS power supply, maintain /RES terminal at LOW level, After the Power supply stabilized, release the reset terminal(/RES = High)

4.4 Display Memory Map

Page address	data	LCD Display (front view)	
3	D0 : D7		
2	D0 : D7		
1	D0 : D7		
0	D0 : D7		
7	D0 : D7		
6	D0 : D7		
5	D0 : D7		
4	D0 : D7		
Column Address		01h	→ 80h



为您提供专业的显示解决方案

HTM12864-7-05G-N3S

4.5 Display Commands

No.	Instructions	Code										Function				
		A0	/RD	/WR	D7	D6	D5	D4	D3	D2	D1		D0			
1	Display ON/OFF	0	1	0	1	0	1	0	1	1	1	1	1	0	DON=0,display off DON=1,display on	
2	Display start line set	0	1	0	0	1	0	0	1	Display start address			Set the display RAM display start line address			
3	Set Page Address	0	1	0	1	0	1	0	1	Page address			Set the display RAM Page address			
4	Ser Column Address (Upper-4 bits)	0	1	0	0	0	0	1	Col. Add			Set the upper-4-bit of column address counter				
	Ser Column Address (Lower-4 bits)	0	1	0	0	0	0	0	Col. Add			Set the low-4-bit of column address counter				
5	Read Staus	0	0	1	Status			0	0	0	0	0	Read the status data			
6	Write Display Data	1	1	0	Write Data						Write data into the display RAM					
7	Read Display Data	1	0	1	Read Data						Read data from the display RAM					
8	ADC Select	0	1	0	1	0	1	0	0	0	0	0	0	0	ADC	Set the display RAM address SEG output Correspondence ADC = 0,Normal. ADC = 1,Reverse
9	Normal/Reverse Display	0	1	0	1	0	1	0	0	1	1	1	1	1	REV	REV = 0, Normal REV = 1, Reverse
10	Entire Display ON/OFF	0	1	0	1	0	1	0	1	0	1	0	0	0	EON	EON = 0, Normal EON = 1, Entire display ON
11	Set LCD Bias	0	1	0	1	0	1	0	0	0	1	0	1	0	Bias	Bias = 0, 1/9 Bias Bias = 1, 1/7 Bias
12	Set Read-Modify-Write	0	1	0	1	1	1	0	0	0	0	0	0	0	0	Enter the "Read-Modify-Write" mode
13	Reset Read-Modify-Write	0	1	0	1	1	1	0	1	1	1	1	1	0	0	Clear the "Read-Modify-Write" mode
14	Reset	0	1	0	1	1	1	0	0	0	0	1	0	0	0	Resets the LCD module
15	SHL S elect	0	1	0	1	1	0	0	1	0	0	0	0	0	0	SHL = 0, Normal SHL = 1, Flipped in y-direction * = don't care terms
		0	1	0	1	1	0	0	1	0	0	0	0	0	0	Set the power circuit operation mode VF : LCD Supply Voltage Follower VR : LCD Supply Voltage Regulator VF : LCD Supply Voltage Converter (1 = ON, 0 = OFF)
17	Regulator Resistor Select	0	1	0	0	0	1	0	0	0	0	0	0	0	Ratio	Set the built-in resistor ratio (Rb/Ra)
18	Electronic volume register set	0	1	0	1	0	0	0	0	0	0	0	0	0	1	Set reference voltage mode
		0	1	0	*	Electronic Control value						Set reference voltage register				
19	Power Save	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Compound instruction Display OFF + Entire Display ON
20	NOP	0	1	0	1	1	0	0	0	0	1	1	0	1	1	Non-operation command


Note:

*a. For the details of the Display Commands, please refer to ST7565R data sheet




4.6 Basic Operating Sequence

Initialization Sequence

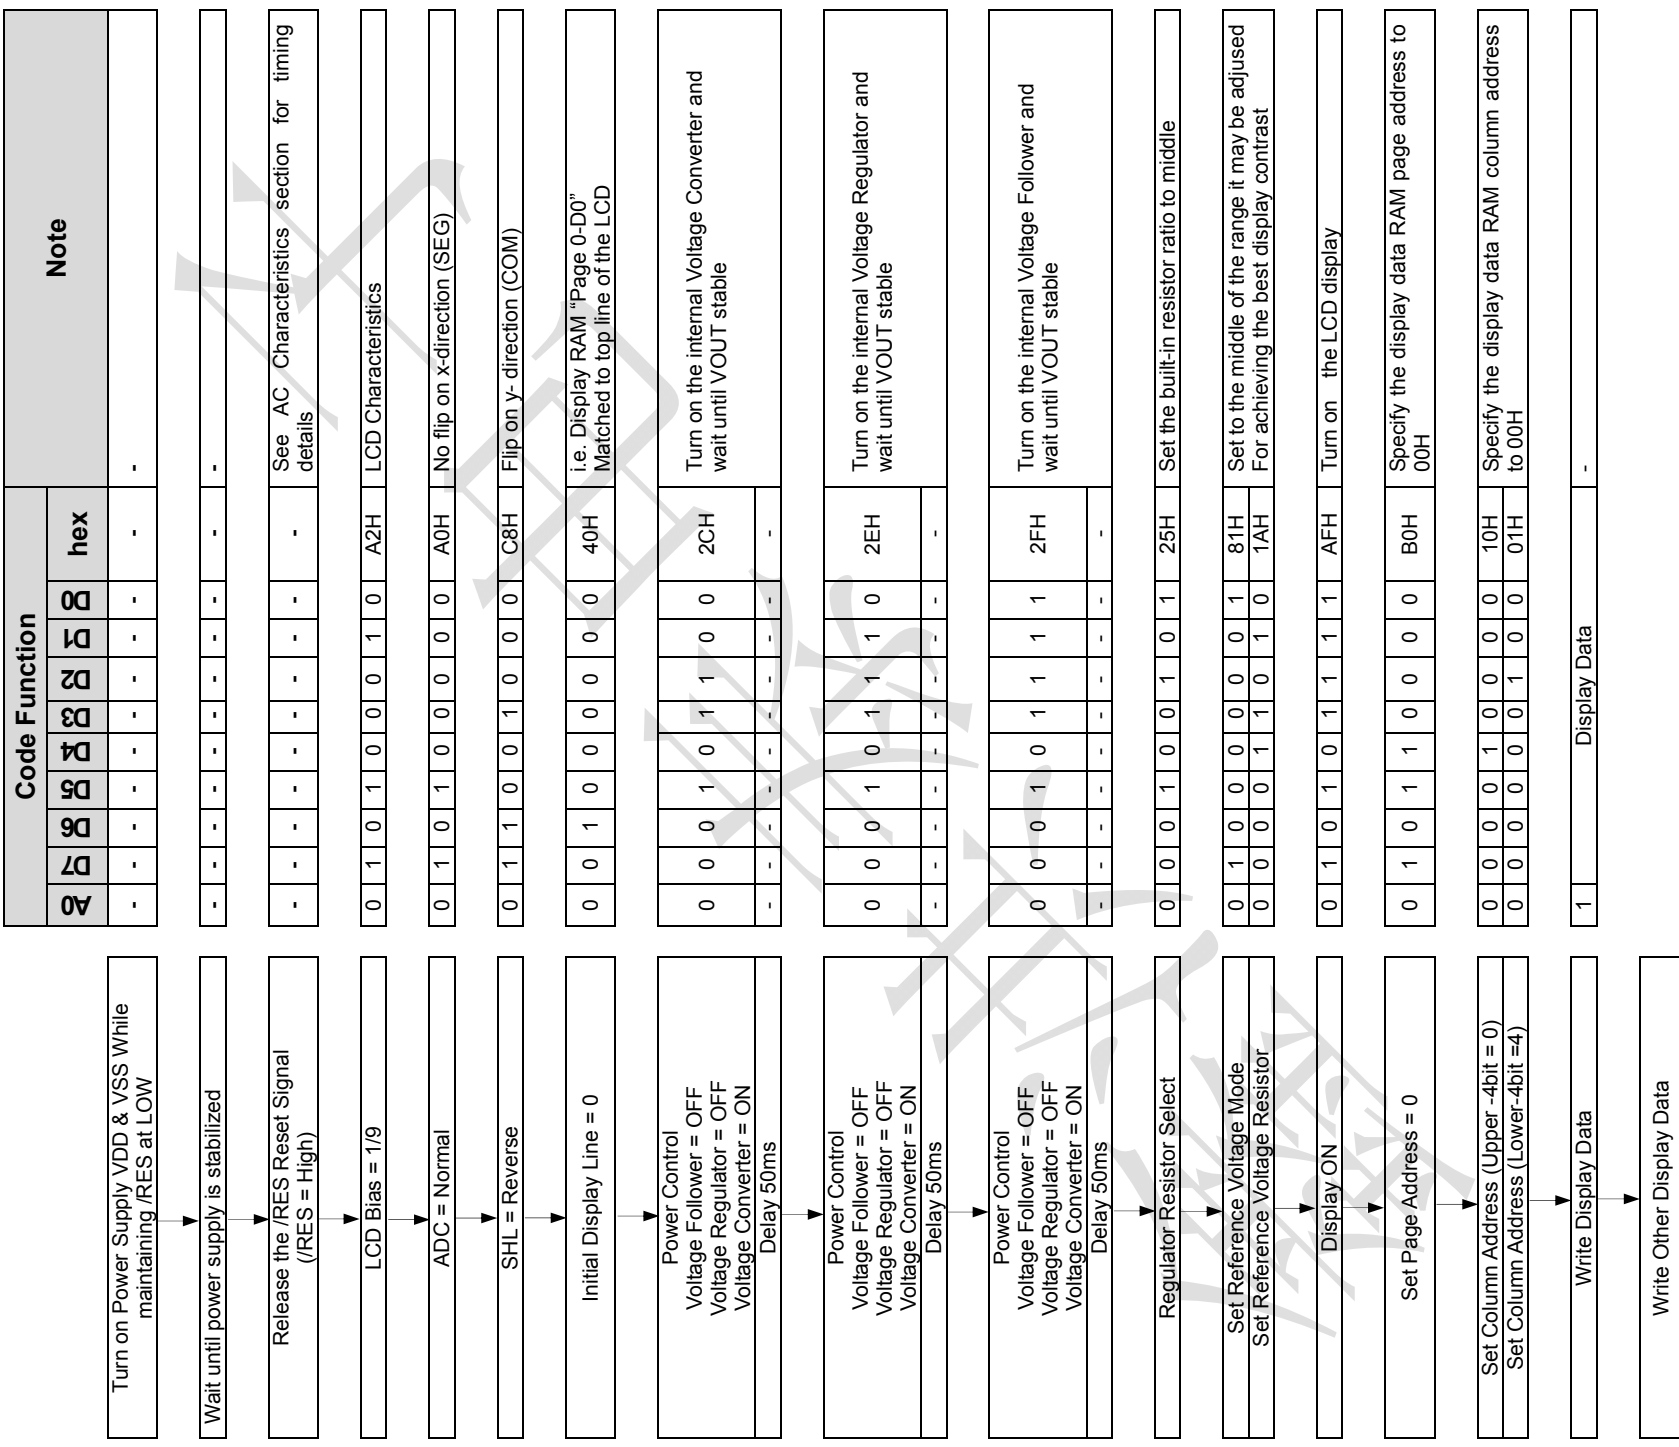

5. Inspection Standards

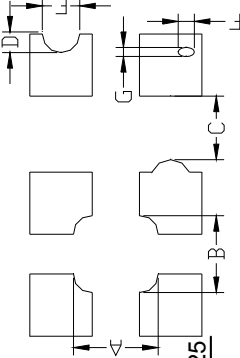Item	Criterion for defects	Defect type
1) Display on inspection	(1) Non display (3) Horizontal line is deficient (2) Vertical line is deficient (4) Cross line is deficient	Major
2) Black / White spot	Size Φ (mm) $\Phi \leq 0.3$ Ignore (note) $0.3 < \Phi \leq 0.45$ 3 $0.45 < \Phi \leq 0.6$ 1 $0.6 < \Phi$ 0	Minor
3) Black / White line	Length (mm) Width (mm) $L \leq 10$ $W \leq 0.03$ Ignore $5.0 \leq L \leq 10$ $0.03 < W \leq 0.04$ 3 $5.0 \leq L \leq 10$ $0.04 < W \leq 0.05$ 2 $1.0 \leq L \leq 10$ $0.05 < W \leq 0.06$ 2 $1.0 \leq L \leq 10$ $0.06 < W \leq 0.08$ 1 $L \leq 10$ $0.08 < W$ follows 2) point defect Defects separate with each other at an interval of more than 20mm	Minor
4) Display pattern	 $A+B \leq 0.28$ 2 $0 < C$ 2 $D+E \leq 0.25$ 2 $F+G \leq 0.25$ 2 Note: 1) Up to 3 damages acceptable 2) Not allowed if there are two or more pinholes every three-fourth inch.	Minor
5) Spot-like contrast irregularity	Size Φ (mm) $\Phi \leq 0.7$ Ignore (note) $0.7 < \Phi \leq 1.0$ 3 $1.0 < \Phi \leq 1.5$ 1 $1.5 < \Phi$ 0 Note: 1) Conformed to limit samples. 2) Intervals of defects are more than 30mm.	Minor
6) Bubbles in polarizer	Size Φ (mm) $\Phi \leq 0.4$ Ignore (note) $0.4 < \Phi \leq 0.65$ 2 $0.65 < \Phi \leq 1.2$ 1 $1.2 < \Phi$ 0	Minor
7) Scratches and dent on the polarizer	Scratches and dent on the polarizer shall be in the accordance with "2) Black/white spot", and "3) Black/White line".	Minor
8) Stains on the surface of LCD panel	Stains which cannot be removed even when wiped lightly with a soft cloth or similar cleaning.	Minor
9) Rainbow color	No rainbow color is allowed in the optimum contrast on state within the active area.	Minor
10) Viewing area encroachment	Polarizer edge or line is visible in the opening viewing area due to polarizer shortness or sealing line.	Minor
11) Bezel appearance	Rust and deep damages that are visible in the bezel are rejected.	Minor
12) Defect of land surface contact	Evident crevices that are visible are rejected.	Minor
13) Parts mounting	(1) Failure to mount parts (2) Parts not in the specifications are mounted (3) For example: Polarity is reversed, HSC or TCP falls off.	Minor
14) Part alignment	(1) LSI, IC lead width is more than 50% beyond outline. (2) More than 50% of LSI, IC leads is off the pad outline.	Minor
15) Conductive foreign matter (solder ball, solder hips)	(1) $0.45 < \Phi$, $N \geq 1$ (2) $0.3 < \Phi \leq 0.45$, $N \geq 1$, Φ : Average diameter of solder ball (unit: mm) (3) $0.5 < L$, $N \geq 1$, L : Average length of solder chip (unit: mm)	Minor
16) Bezel flaw	Bezel claw missing or not bent	Minor
17) Indication on name plate (sampling indication label)	(1) Failure to stamp or label error, or not legible.(all acceptable if legible) (2) The separation is more than 1/3 for indication discoloration, in which the characters can be checked.	Minor



鑫洪泰

HOT DISPLAY 为您提供专业的显示解决方案

HTM12864-7-05G-N3S

6. Handling Precautions

6.1 Mounting method

A panel of LCD module made by our company consists of two thin glass plates with polarizers that easily get damaged. And since the module is so constructed as to be fixed by utilizing fitting holes in the printed circuit board (PCB), extreme care should be used when handling the LCD modules.

6.2 Cautions of LCD handling and cleaning

When cleaning the display surface, use soft cloth with solvent (recommended below) and wipe lightly.

- Isopropyl alcohol
- Ethyl alcohol
- Trichlorotrifluoroethane

Do not wipe the display surface with dry or hard materials that will damage the polarizer surface.

Do not use the following solvent:

- Water
- Ketene
- Aromatics

6.3 Caution against static charge

The LCD module uses C-MOS LSI drivers. So we recommend you:

Connect any unused input terminal to V_{dd} or V_{ss} . Do not input any signals before power is turned on, and ground your body, work/assembly areas, assembly equipment to protect against static electricity.

6.4 Packaging

-Module employs LCD elements, and must be treated as such. Avoid intense shock and falls from a height.

-To prevent modules from degradation, do not operate or store them exposed direct to sunshine or high temperature/humidity.

6.5 Caution for operation

-It is an indispensable condition to drive LCD module within the limits of the specified voltage since the higher voltage over the limits may cause the shorter life of LCD module.

-An electrochemical reaction due to DC (direct current) causes LCD undesirable deterioration so that the uses of DC (direct current) drive should be avoided.

-Response time will be extremely delayed at lower temperature than the operating temperature range and on the other hand at higher temperature LCD module may show dark color in them. However those phenomena do not mean malfunction or out of order of LCD module, which will come back in the specified operating temperature.

6.6 Storage

In the case of storing for a long period of time, the following ways are recommended:

- Storage in polyethylene bag with the opening sealed so as not to enter fresh air outside in it. And with not desiccant.
- Placing in a dark place where neither exposure to direct sunlight nor light is. Keeping the storage temperature range.
- Storing with no touch on polarizer surface by any thing else.

6.7 Safety

-It is recommendable to crash damaged or unnecessary LCD into pieces and to wash off liquid crystal by either of solvents such as acetone and ethanol, which should be burned up later.

-When any liquid leaked out of a damaged glass cell comes in contact with your hands, please wash it off well at once with soap and water.

7. Packaging Specifications

	Packaging Specifications				Approved	Checked	Designed
	HTM12864-7						

7.1 Packaging Material

No	Item	Dimensions (mm)	1PCS Weight (KG)	Quantity	Total Weight
1	LCM	95.0*55.7*7.8	0.062	200	12.4
2	PE Bag	120*100	0.001	200	0.2
3	Foam Rubber Cushion	310*170	0.0175	8	1.4
4	Partition AI	310*200*100	0.30	4	1.2
5	Product Box	330*180*120 (neutral packing)	0.45	4	1.8
6	Carton	390*370*350 (neutral packing)	0.9	1	0.9
7	Tape			AR	
8	Label Specifications			1	
9	Label Rohs			1	
10	Label ESD			1	

7.2. Total LCD Weight in carton: 17.8 KG±10%

7.3. Packaging Specifications and Quantity:

(1) Quantity Of Spacer: AI*4

(2) Total LCM quantity in carton: quantity per box 50* no of boxes 4 = 200

