

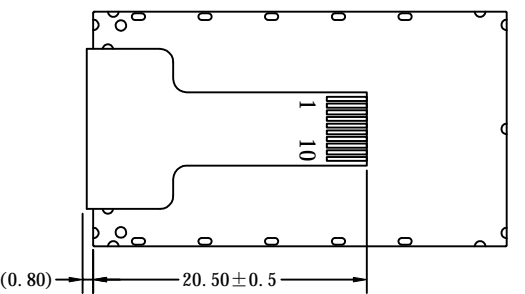
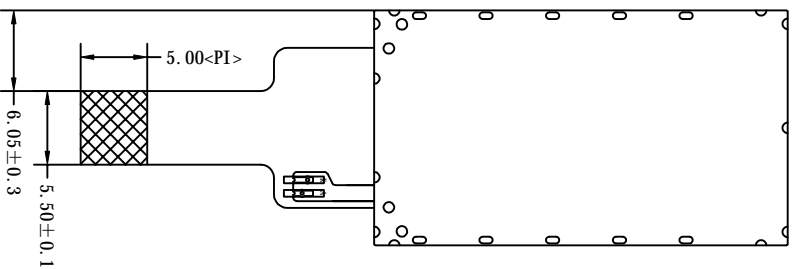


*** Do not display the fixed pattern for a long time when using a normally black panel, as it may cause image sticking due to the LCM structure. If the screen is displayed in fixed mode, use a screen saver. It is recommended to display the fixed mode in less than 2 minutes or less.

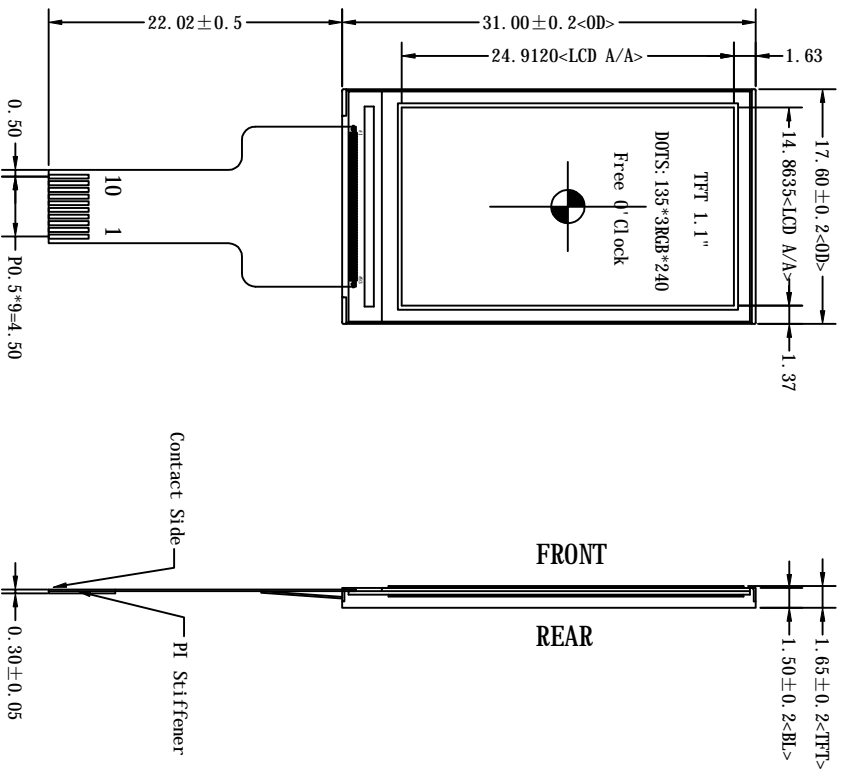

PIN NO.	SIGNAL
1	LED_A
2	VCI
3	CS
4	RESX
5	SCK
6	SDA
7	D/CX
8	TE
9	LED_K
10	GND

FPC弯折尺寸参考
展开出货

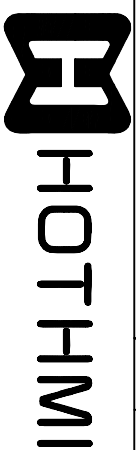

Part Title: TFT-H011A1QCT3TN10

Scale	Unit	Tol.	Date:
1:1	mm	±0.3	2019-09-03
Ver:	Drawn:	Lin	
V0			

*1. LCD Display Type	TFT, Transmissive, Normally Black	*6. Storage Temp	-30° C-80° C
*2. Viewing Direction	Free of Clock (U80/D80/L80/R80)	*7. Driver IC	ST7789H2
*3. Interface	SPI-4L	*8. Backlight	WHITE VF=3.2V IF=20mA(Typ)
*4. Operating Voltage	VCI=2.8V, IOWCC=1.8V(Typ)	*9. LCM Brightness	350 cd/m ² (Typ)
*5. Operating Temp	-20° C-70° C		

