



***为防止LCD产生图像残留，在使用常黑面板时不要长时间显示固定图案。如果LCD需要显示固定图案，建议时间少于2分钟或者更短的时间内刷新显示内容一次或多次。
 ***In order to prevent the LCD from producing image retention, do not display a fixed pattern for a long time when using a normally black panel. If the LCD needs to display a fixed pattern, it is recommended to refresh the display one or more times in less than 2 minutes or less.
 强烈建议使用黑色图像或移动图像作为屏幕保护程序。It is strongly recommended to use a black image or moving image as a screen saver.

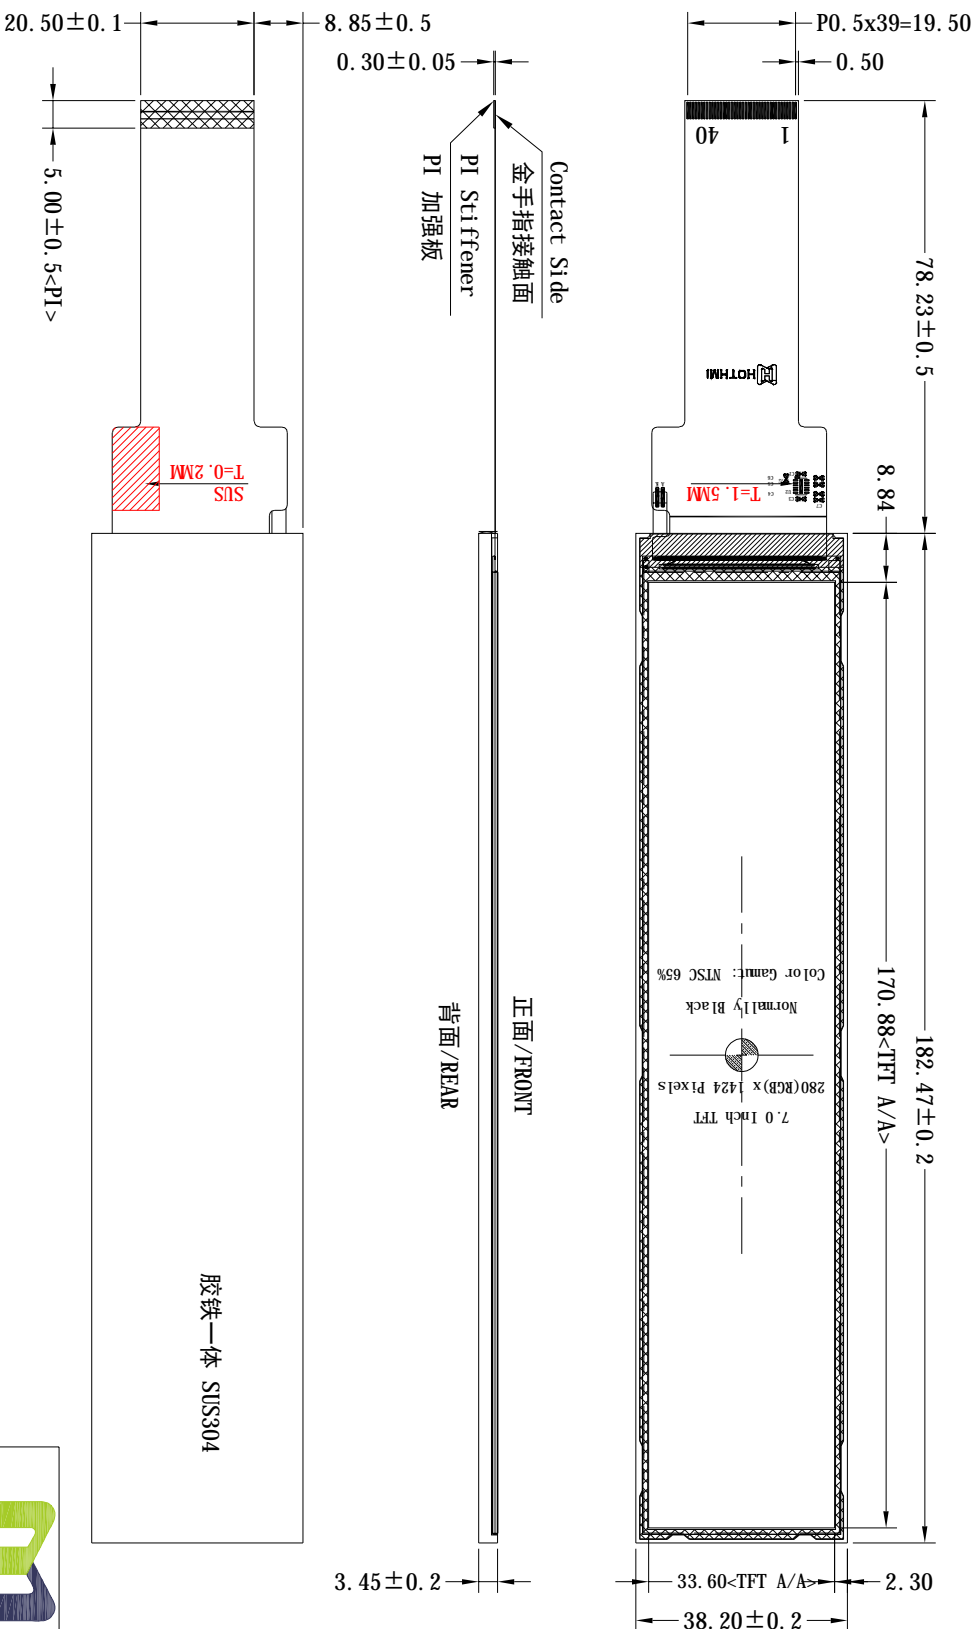

Pin_SIGNAL	Pin_SIGNAL	D3P
1	NC	21
2	VCI	22
3	VCI	23
4	NC	24
5	RESX	25
6	STBYB	26
7	GND	27
8	DON	28
9	DOP	29
10	GND	30
11	D1N	31
12	D1P	32
13	GND	33
14	D2N	34
15	D2P	35
16	GND	36
17	DCKN	37
18	DCKP	38
19	GND	39
20	D3N	40

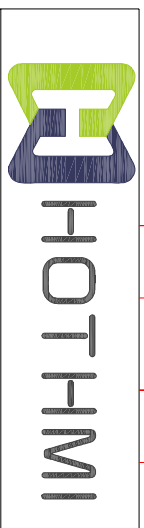

产品型号
TFT-H070A21ZBIN6N40

比例	1:1	设计制图	Li u. YL	日期	2024-07-01
版本	V0-0	单位	MM	公差	±0.3

观看方向/角度 Viewing Direction	U85/D85/R85/L85	TFT 储存温度 TFT Storage Temp	-40 °C ~ 80 °C
接口 Interface	MPI 4L	驱动芯片 Driver IC	ST7703
工作电压 Operating Voltage	10VCC=1.8V, VCI=3.3V (Typ)	背光驱动条件 Backlight conditions	Vf= 15.0 ~ 17.0V, If= 80 mA
TFT 工作温度 TFT Operating Temp	-30 °C ~ 80 °C	液晶模组亮度 LCM Brightness	650 cd/m² (Typ)/固定电流测试